



# GL-Series Luminaire Mounting Details

## Prepare Luminaire for mounting:


1) Remove 2 Torx or Phillips screws here.

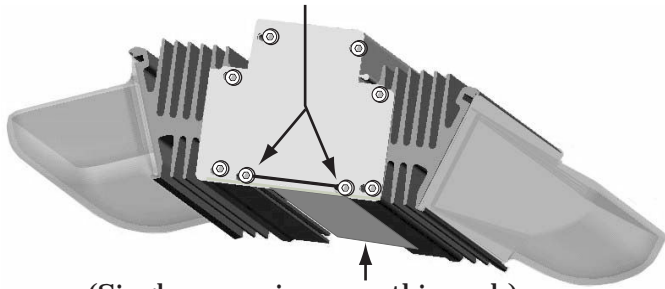

2) Slide bottom cover outward to expose wiring, photocells and mounting keyhole.

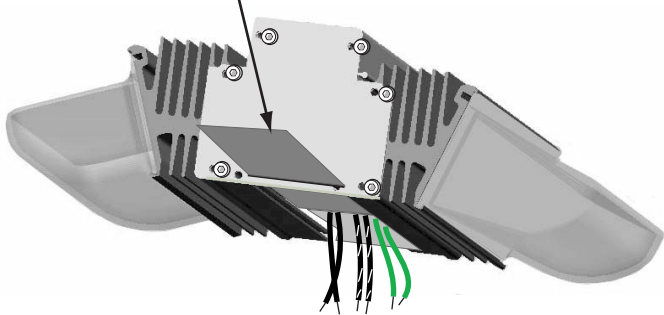

← SLIDE →

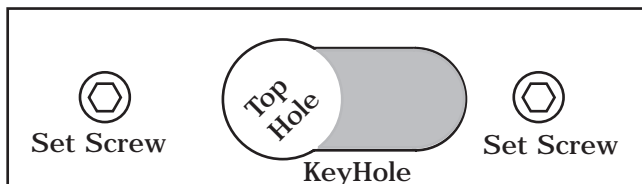

8) Slightly loosen set-screws and slide keyhole until top hole shows full clearance.

9) Guide the Box Adapter wiring into Luminaire top hole while pressing Luminaire fully onto Nipple.

10) Slide KeyHole to lock into groove in Box Adapter Nipple. Luminaire can now be rotated to align illumination pattern, and can be locked at 5° increments. Observe Drive Direction on Cut-Off Luminaires.

11) Tighten both Allen Set Screws. Do NOT over-tighten, these screws only lock the slide in place.

12) Connect wiring according to color code table with wire connectors supplied. Be sure to connect all 6-wires in dual-sided luminaires as shown in the figure of step 2.

**Note:** Photocells are defeated by shorting the small-gauge blue & brown wires on each wing. Photocells can be used individually, or synchronized together by connecting Brn-Brn and Blu-Blu.


13) Reverse steps 2 and 1 above to close Luminaire and finish installation.

3) Kill Main Power.

Determine if connecting Luminaire by conduit to end, or if mounting by box or pendant. If mounting with conduit, remove appropriate knock-outs and proceed to step 12.

4) Remove cover from existing wiring box.

5) Feed wiring through nipple in the separate box adapter supplied with Luminaire.

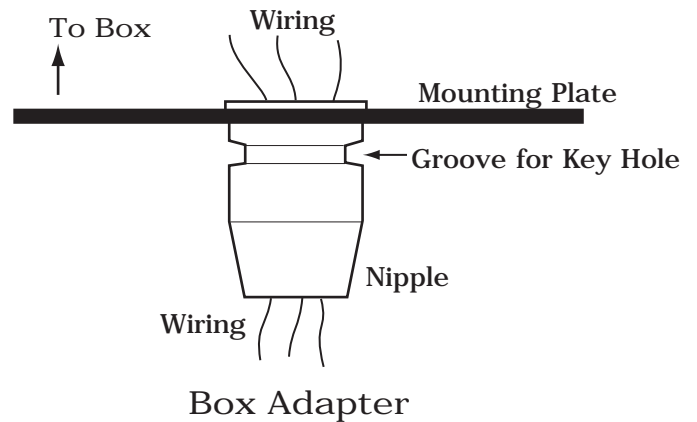

6) Attach adapter mounting plate to box with 2 or 4 screws.

7) Locate KeyHole slide inside top of Luminaire as shown here.

Building Wiring		Luminaire
120V	208V to 277V	120 - 277 VAC
Black	Bk, Rd, Blu	Black
White	Bk, Rd, Blu	Black / Wht
Grn / Bare	Grn / Bare	Green



IntenCity Lighting, Inc. 22922 No. Highway 7, Dardanelle, AR 72834 (479) 229-0013

IntenCity-I is a trademark of IntenCity Lighting, Inc. (ILI) All rights reserved. U.S. & International Patent(s) Pending. ILI is not responsible for improper use or application of product. ILI reserves the right to change or improve product specifications without notice.